

LIST OF PROPERTIES		
		B7119
<b>MATERIAL COMPOSITION</b>		
FABRIC		100 % PES / 1100 DTEX
TOTAL WEIGHT	DIN EN ISO 2286/2 1998	630 G/M <sup>2</sup>
LACQUERING		1/1
EMBOSSING		GLOSSY
BREAKING STRENGTH WARP	EN ISO 1421/1 1998	2500 N / 5 CM
BREAKING STRENGTH WEFT	EN ISO 1421/1 1998	1800 N / 5 CM
TEAR STRENGTH WARP	DIN 53363 2003	250 N
TEAR STRENGTH WEFT	DIN 53363 2003	250 N
ADHESION	EN ISO 2411 2000	90 N / 5 CM
TEMPERATURE RESISTANCE	DIN EN 1876/2 1998	-30/+70°C
LIGHT FASTNESS (EXCEPT WHITE AND (HALF-)TRANSPARENT)	ISO 105 B02 1988	7 - 8
FIRE BEHAVIOR	ISO 3795 1989	< 100 MM/MIN
APPLICATION		TRUCK / FLAT COVER

All our technical characteristics are indicative



1001 - 250 / 300 CM



1687 - 250 / 300 CM



3001 - 250 / 300 CM



3017 - 250 CM



3023 - 250 CM



5001 - 250 / 300 CM



5007 - 250 / 300 CM



5029 - 250 CM




5032 - 250 / 300 CM



6001 - 250 / 300 CM



6036 - 250 CM

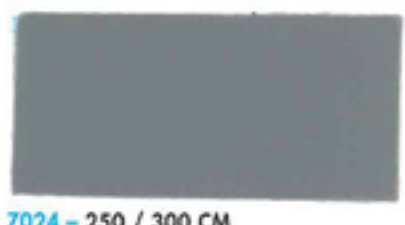

7024 - 250 / 300 CM




7193 - 250 / 300 CM



7500 - 250 / 300 CM



7999 - 250 / 300 CM

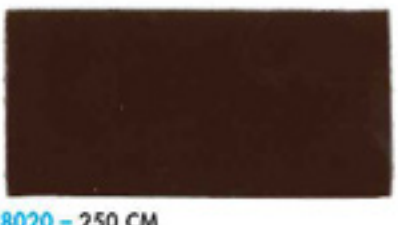

8020 - 250 CM



9002 - 250 / 300 CM