


CAMPING • B9550

LIST OF PROPERTIES		B9550
MATERIAL COMPOSITION		
FABRIC		100 % PES / 1100 DTEX
TOTAL WEIGHT	DIN EN ISO 2286/2 1998	550 G/M ²
CHARACTERISTICS		ABUV
LACQUERING		1/1
EMBOSSING		DULL
BREAKING STRENGTH WARP	EN ISO 1421/1 1998	3000 N / 5 CM
BREAKING STRENGTH WEFT	EN ISO 1421/1 1998	2800 N / 5 CM
TEAR STRENGTH WARP	DIN 53363 2003	300 N
TEAR STRENGTH WEFT	DIN 53363 2003	300 N
ADHESION	EN ISO 2411 2000	100 N / 5 CM
LIGHT FASTNESS (EXCEPT WHITE AND (HALF-)TRANSPARENT)	ISO 105 B02 1988	7 - 8
TEMPERATURE RESISTANCE	DIN EN 1876/2 1998	-30/+70 °C
FIRE BEHAVIOR	ISO 3795 1989	< 100 MM/MIN
APPLICATION		GROUNDSHEET / FLOORING

All our technical characteristics are indicative.

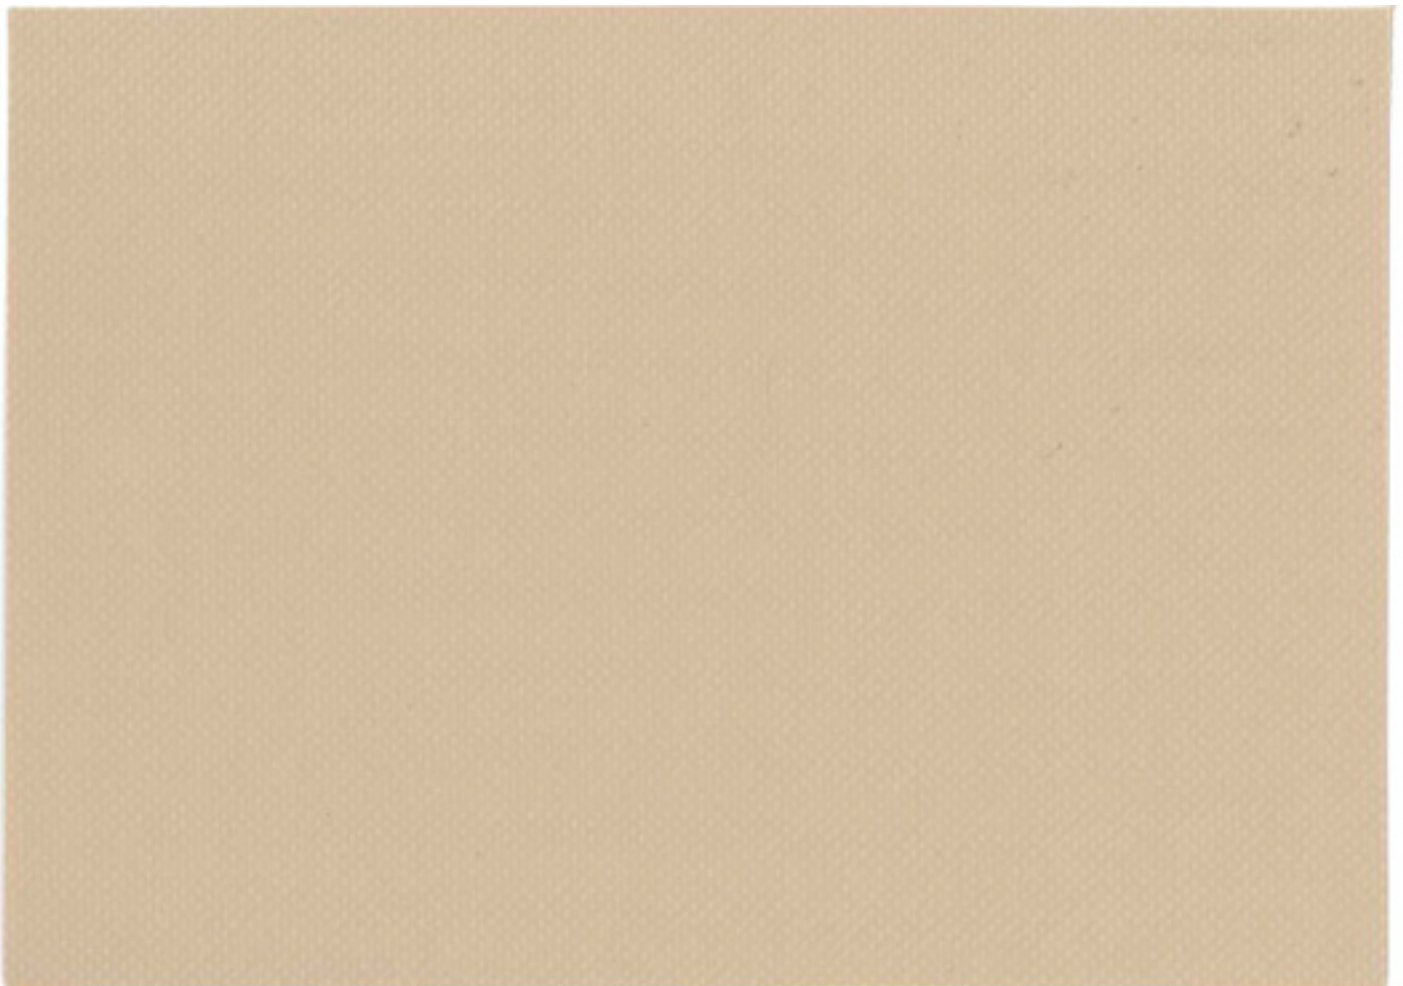

1617 - 250 / 300 CM - MIN 1000 LM