


# CAMPING • C5525

LIST OF PROPERTIES		C5525
<b>MATERIAL COMPOSITION</b>		
FABRIC		100 % PES / 550 DTEX
TOTAL WEIGHT	DIN EN ISO 2286/2 1998	520 G/M <sup>2</sup>
CHARACTERISTICS		ABUV / OPQ
LACQUERING		1/1
EMBOSSING		DULL
BREAKING STRENGTH WARP	EN ISO 1421/1 1998	2100 N / 5 CM
BREAKING STRENGTH WEFT	EN ISO 1421/1 1998	1500 N / 5 CM
TEAR STRENGTH WARP	DIN 53363 2003	100 N
TEAR STRENGTH WEFT	DIN 53363 2003	100 N
ADHESION	EN ISO 2411 2000	60 N / 5 CM
TEMPERATURE RESISTANCE	DIN EN 1876/2 1998	-30/+70 °C
LIGHT FASTNESS	ISO 105 B02 1988	7 - 8
FIRE BEHAVIOR	ISO 3795 1989	< 100 MM/MIN
APPLICATION		ROOF / PLAIN

All our technical characteristics are indicative.

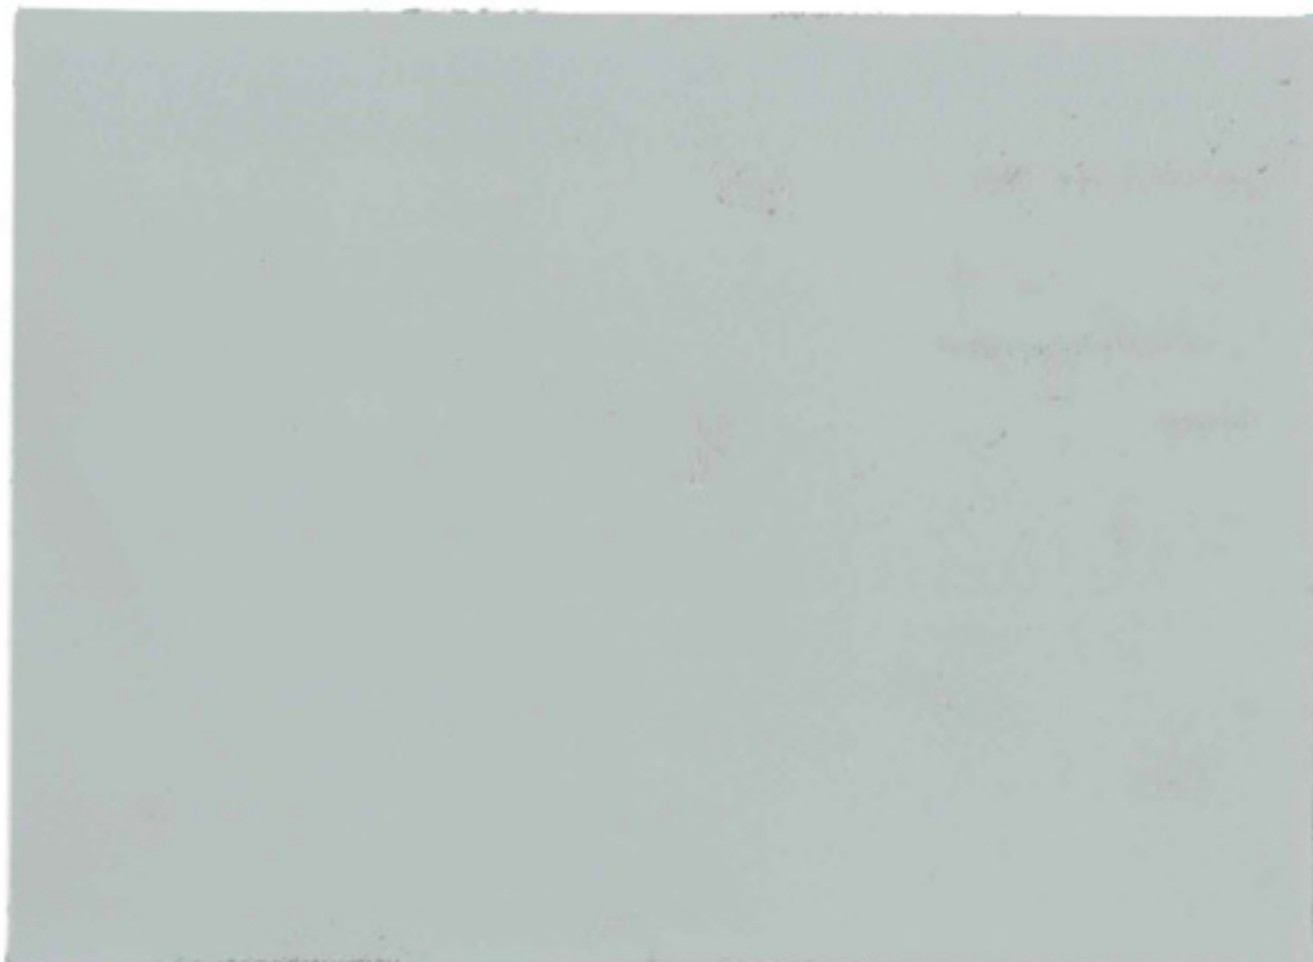

7003 – 260 / 275 / 300 CM