


ANTISKID • G2700

LIST OF PROPERTIES	
G2700	
	MATERIAL COMPOSITION
100 % PES / 1100 DTEX	FABRIC
700 G/M ²	TOTAL WEIGHT DIN EN ISO 2286/2 1998
AB / PHTHALATE FREE	CHARACTERISTICS
-/-	LACQUERING
ANTISKID	EMBOSSING
2500 N / 5 CM	BREAKING STRENGTH WARP EN ISO 1421/1 1998
2000 N / 5 CM	BREAKING STRENGTH WEFT EN ISO 1421/1 1998
270 N	TEAR STRENGTH WARP DIN 53363 2003
270 N	TEAR STRENGTH WEFT DIN 53363 2003
90 N / 5 CM	ADHESION EN ISO 2411 2000
7 - 8	LIGHT FASTNESS (EXCEPT WHITE AND (HALF-)TRANSPARENT ISO 105 B02 1988
-30/+70 °C	TEMPERATURE RESISTANCE DIN EN 1876/2 1998
M2	FIRE BEHAVIOR NF P 92 507 2004

All our technical characteristics are indicative.



5999 - 218 CM

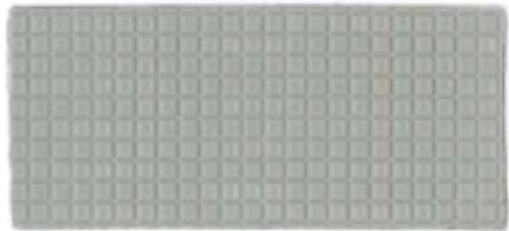

7003 - 218 CM