


LIST OF PROPERTIES	
	S2759
MATERIAL COMPOSITION	
FABRIC	100 % PES / 1100 DTEX
TOTAL WEIGHT DIN EN ISO 2286/2 1998	600 G/M ²
CHARACTERISTICS	1-Z
LACQUERING	-/-
EMBOSSING	ANTISKID
BREAKING STRENGTH WARP EN ISO 1421/1 1998	2500 N / 5CM
BREAKING STRENGTH WEFT EN ISO 1421/1 1998	2000 N / 5CM
TEAR STRENGTH WARP DIN 53363 2003	270 N
TEAR STRENGTH WEFT DIN 53363 2003	270 N
ADHESION EN ISO 2411 2000	90 N / 5 CM
LIGHT FASTNESS (EXCEPT WHITE AND (HALF-)TRANSPARENT ISO 105 B02 1988	7 - 8
TEMPERATURE RESISTANCE DIN EN 1876/2 1998	-30/+70 °C
FIRE BEHAVIOR ISO 3795 1989	< 100 MM/MIN



S2759 – 5999 – 205 / 218 CM 

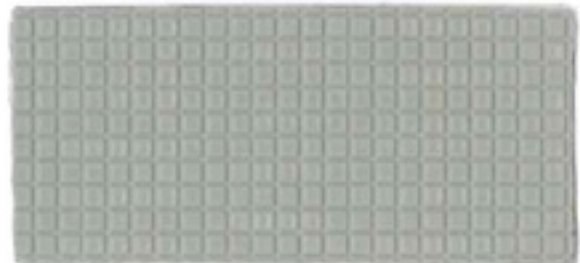

S2759 – 7003 – 205 / 218 CM 